FRONT FORK
SPRING KIT

FOR YAMAHA XVS1100A DRAG STAR CLASSIC

⚠ WARNING!

It is advisable to have an Öhlins dealer install the springs. Consult your vehicle service manual when installing this product.

1 Put the motorcycle on a workstand so that the front wheel barely touches the ground.

⚠ WARNING!

Make sure that the vehicle is securely supported so that it will not tip.

2 Remove the top cap.

3 Remove the original spacer, washer and fork spring. *Note! You will **not** need the original spacer, washer or spring for the installation of the Öhlins front fork spring.*

4 Check the oil level and the quality of the oil *(with the front fork compressed and no springs installed)*.

Recommended oil level: **125 mm**





5 Install the Öhlins spring *(tighter wound coils to the top)*, the spacer *(if any; there are two options given here below)* and finally the top cap *(with the front fork fully extended)*.

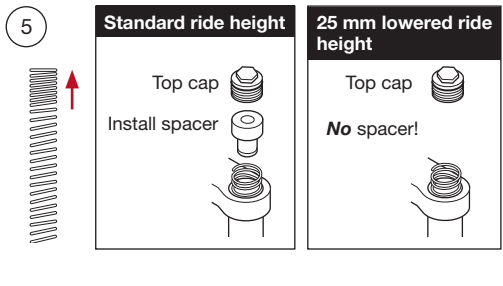

Spring kit 08847-01 20070910

Öhlins Racing AB, Box 722,
S-194 27 Upplands Väsby, Sweden
Phone +46 8 590 025 00, Fax +46 8 590 025 80,
E-mail: info@ohlins.se, www.ohlins.com
Part no. 01200-05

ÖHLINS
ADVANCED SUSPENSION TECHNOLOGY